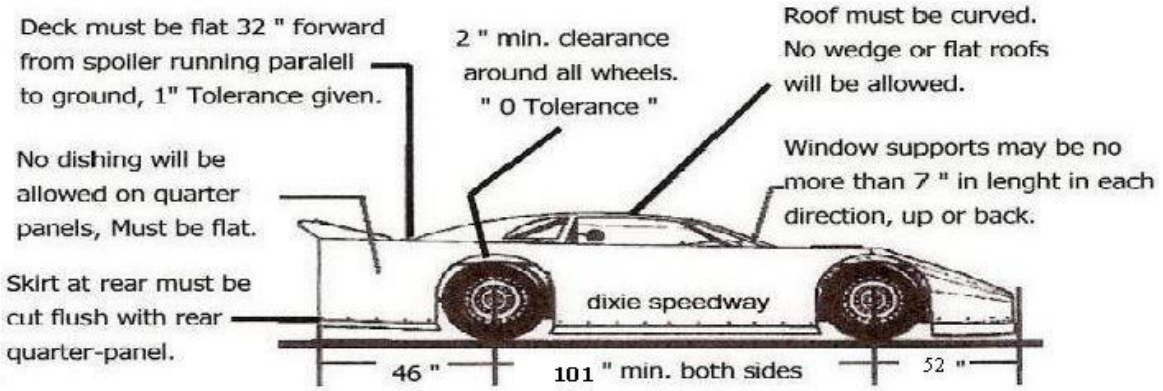
Deck must be flat 32 " forward from spoiler running paralell to ground, 1" Tolerance given.
2 " min. clearance around all wheels. " 0 Tolerance "
Roof must be curved. No wedge or flat roofs will be allowed.
No dishing will be allowed on quarter panels, Must be flat.
Window supports may be no more than 7 " in lenght in each direction, up or back.
Skirt at rear must be cut flush with rear quarter-panel.
dixie speedway
46 "
101 " min. both sides
52 "

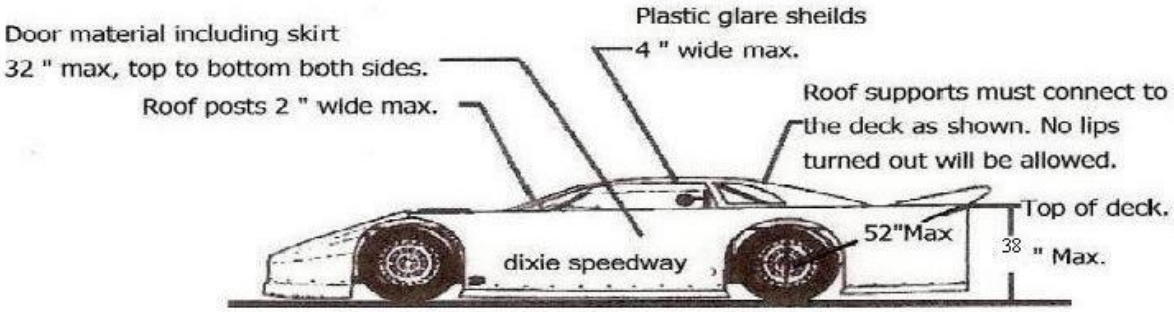
Door material including skirt 32 " max, top to bottom both sides.
Plastic glare sheilds 4 " wide max.
Roof posts 2 " wide max.
Roof supports must connect to the deck as shown. No lips turned out will be allowed.
Top of deck.
52"Max
38 " Max.
dixie speedway

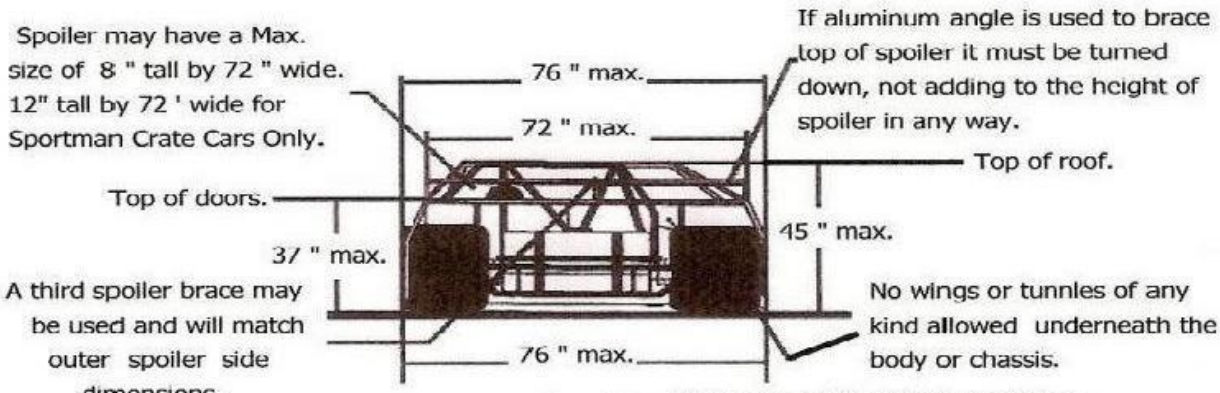
Spoiler may have a Max. size of 8 " tall by 72 " wide. 12" tall by 72 ' wide for Sportman Crate Cars Only.
76 " max.
72 " max.
If aluminum angle is used to brace top of spoiler it must be turned down, not adding to the height of spoiler in any way.
Top of roof.
Top of doors.
37 " max.
45 " max.
A third spoiler brace may be used and will match outer spoiler side dimensions.
76 " max.
No wings or tunnles of any kind allowed underneath the body or chassis.

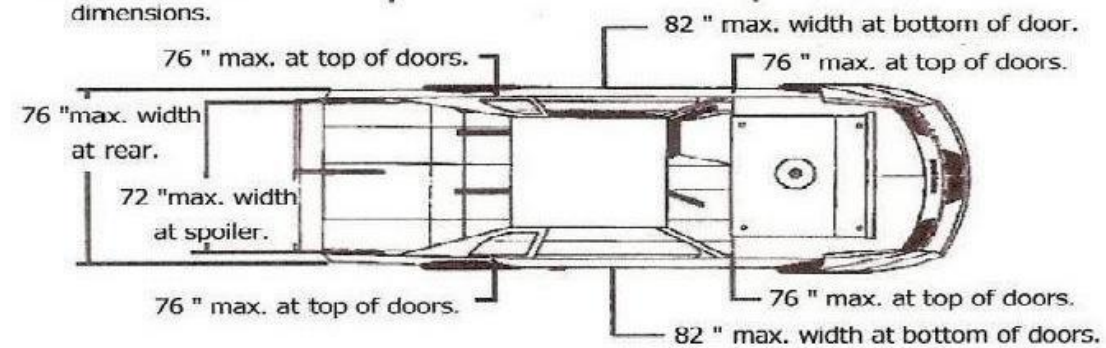
82 " max. width at bottom of door.
76 " max. at top of doors.
76 " max. at top of doors.
76 "max. width at rear.
72 "max. width at spoiler.
76 " max. at top of doors.
76 " max. at top of doors.
82 " max. width at bottom of doors.

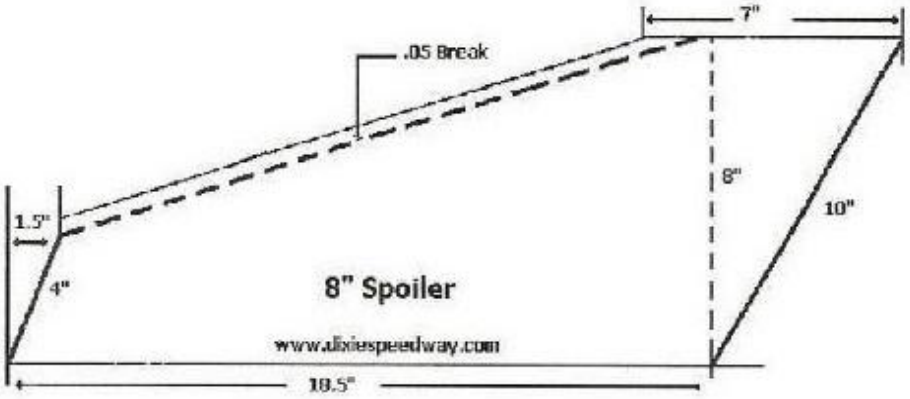

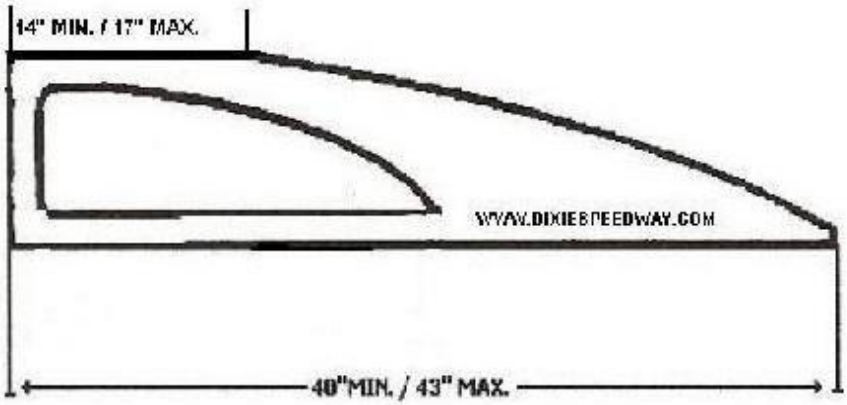

Track reserves the right to delete, change, or amend rules in the interest of competition.
2018 Dixie Speedway all rights reserved.